

FLEX 50 COLOR


The FLEX flexible silicone tube is a lighting product that allows maximum freedom of expression: thanks to the contacts at the ends you can install it directly to the plant or connect multiple FLEX lamps in series.

TECHNICAL SPECIFICATIONS

Standard	Directive 2014/35/UE EN 60598-1 EN 60598-2-1 Directive 2011/65/UE EN 50581
Material	Diffuser in silicone Fittings in coated steel
Treatment	Powder coating
Voltage	24 V
Wattage	10 W
Temperature	2700 K 3000 K
Lumen	912 lm 960 lm
Color rendering	80+/90+
Protection grade IP	IP67
Fire resistance	V1
Impact resistance	IK02
Operating temperature	-20°C - +50°C
Driver	24 V DC - min. 15W


LF50-Color

Dimensions (mm)
Ø 22 - L 50

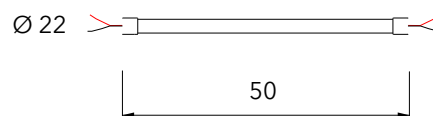

FLEX section

1. silicone tube
luminous surface Ø 18
2. flexural and
tensile resistant
3. light board
4. lamp board



360°
LIGHT

AVAILABLE COLORS



FLEX 100 COLOR



The FLEX flexible silicone tube is a lighting product that allows maximum freedom of expression: thanks to the contacts at the ends you can install it directly to the plant or connect multiple FLEX lamps in series.

TECHNICAL SPECIFICATIONS

Standard	Directive 2014/35/UE EN 60598-1 EN 60598-2-1 Directive 2011/65/UE EN 50581
Material	Diffuser in silicone Fittings in coated steel
Treatment	Powder coating
Voltage	24 V
Wattage	20 W
Temperature	2700 K 3000 K
Lumen	1825 lm 1920 lm
Color rendering	80+/90+
Protection grade IP	IP67
Fire resistance	V1
Impact resistance	IK02
Operating temperature	-20°C - +50°C
Driver	24 V DC - min. 25W


LF100-Color

Dimensions (mm)
Ø 22 - L 100

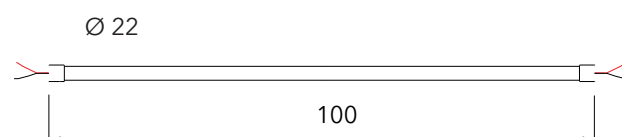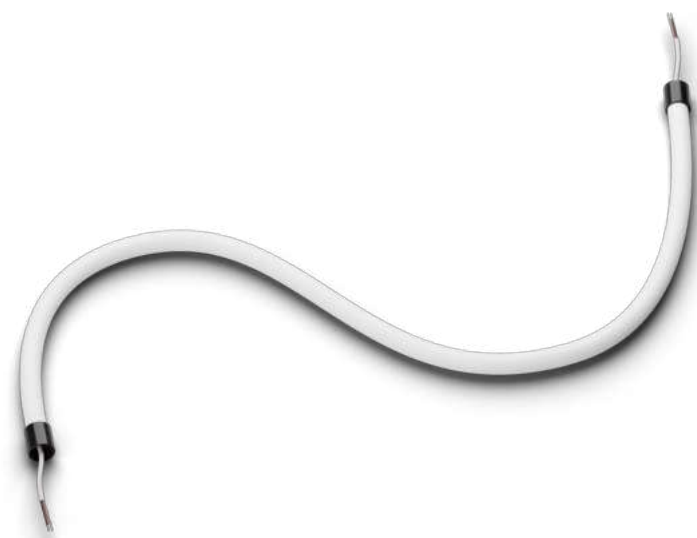

FLEX section

1. silicone tube
luminous surface Ø 18
2. flexural and
tensile resistant
3. light board
4. lamp board



AVAILABLE COLORS

