

BRACKET and FLANGE SILVER


The Genuit connection and fastening systems are characterized by attention to detail and the quality of materials used. This ensures stylistic continuity with the other visible components of the system.

TECHNICAL SPECIFICATIONS


Material	Aluminum alloy
Treatment	Aluminum die casting (protective treatment available upon request)
Electrical continuity	Through metal spring
Pipe inlet	Ø22 mm
Resistenza agli urti	IK10
Storage temperature	-50°C - +90°C
Operating temperature	-40°C - +90°C



Bracket
SF22 Silver
53x13x35 mm



Single Flange
FLS Silver
92x46x32 mm

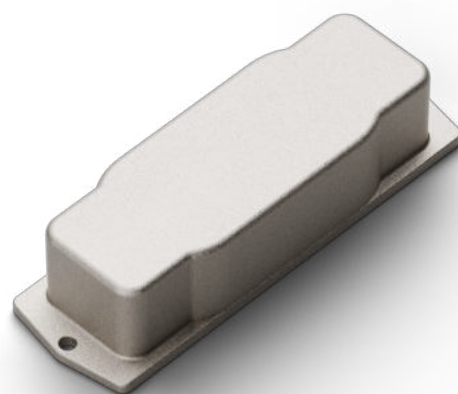

Double Flange
FLD Silver
144x46x32 mm