

SKYNE blind profile

SKYNE profile integrates lighting and electrification in a single element.


With SKYNE is possible create linear LED lighting systems and low voltage spots, integrating the traditional off-track system with switch modules and standard 220V electrical sockets.

TECHNICAL SPECIFICATIONS

Standard	IEC/EN 602208 IEC/EN 60670-1
Material	Aluminum (tube) Black polycarbonate (protective profile) Galvanized steel (end fittings)
Treatment	Coated (tube in color black)
Protection grade IP	IP40
Impact resistance	IK10
Isolation class	I
Entry fitting	Ø 22 to drill
Storage temperature	-50°C - +90°C
Operating temperature	-40°C - +90°C

SKC-Color

Dimensions (mm)
Ø 22 - L max. 3000

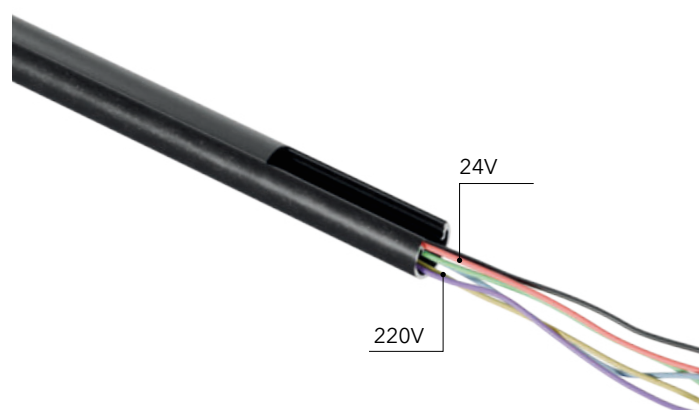


METAL FINISHES

					
SILVER Natural aluminum	GRAPHITE Coated aluminum	COPPER Coppered aluminum	BLACK RAL 9005	WHITE RAL 9010	BLUE RAL 5001
					
Silver Galvanized steel	CORTEN Coated steel	Copper Coppered steel Copper	GREEN RAL 6016	CORAL RAL 2012	SAND RAL 6016

RAL COLORS

Protective profile

Cabling area
220V



Removable
aluminum divider

Aluminum profile