

SKYNE Light profile - COLOR

SKYNE profile integrates lighting and electrification in a single element.


With SKYNE is possible create linear LED lighting systems and low voltage spots, integrating the traditional off-track system with switch modules and standard 220V electrical sockets.

SKL-Color

Dimensions (mm)
Ø 22 - L max. 3000

TECHNICAL SPECIFICATIONS

Standard	IEC/EN 602208 IEC/EN 60670-1
Material	Aluminum (tube) Opal polycarbonate (light diffuser) Galvanized steel (end fittings)
Treatment	Powder coating
Protection grade IP	IP40
Impact resistance	IK10
Isolation class	I
Entry fitting	Ø 22 to drill
Storage temperature	-50°C - +90°C
Operating temperature	-40°C - +90°C
Light source	Strip LED - 24V
Temperature	2700 K 3000 K

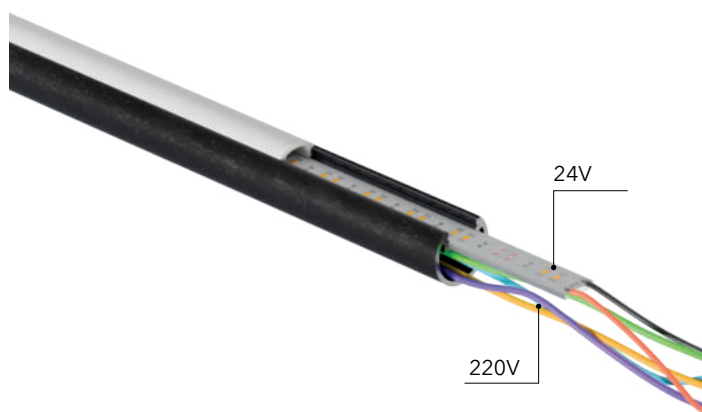

RAL COLORS

