

FLYNE 23 GRAPHITE


FLYNE is designed to be integrated directly into the lighting system or used as a single fixture. The LED housed within a tubular body provides uniform, all-around illumination. The reflector, available in two different sizes, can be installed at any point and combined with other reflectors on the same lamp.

TECHNICAL SPECIFICATIONS

Material	Diffuser in polycarbonate Galvanized steel
Treatment	Galvanizing
Voltage	24 V
Wattage	10 W
Temperature	2700 K 3000 K
Lumen	539 lm 567 lm
Color rendering	80+/90+
Protection grade IP	IP20
Fire resistance	V1
Impact resistance	IK02
Operating temperature	-20°C - +50°C
Driver	24 V DC - min. 15W

Ø 22 KLFL232-22 | KLFL233-22 Graphite
Ø 30 KLFL232-30 | KLFL233-30 Graphite

Dimensioni (mm)
Ø 22 - L 23

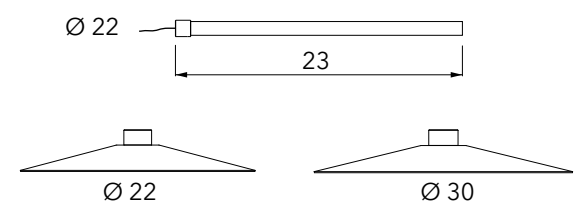

FLYNE section

1. polycarbonate Ø 22
2. silicone tube
luminous surface Ø 18
3. flexural and
tensile resistant
4. light board
5. lamp board

